

VRF AHU Control Box

High Efficiency

AHU Control Box facilitates raising the EER/COP of the complete AHU system.




Wide Capacity Range

Four Control Box can be used in parallel, giving an overall capacity range of 3.2HP to 80HP.




Compatible with All VRF Systems


AHU Control Box are compatible with all Midea VRF outdoor units and can be used together with all types of Midea VRF indoor units.

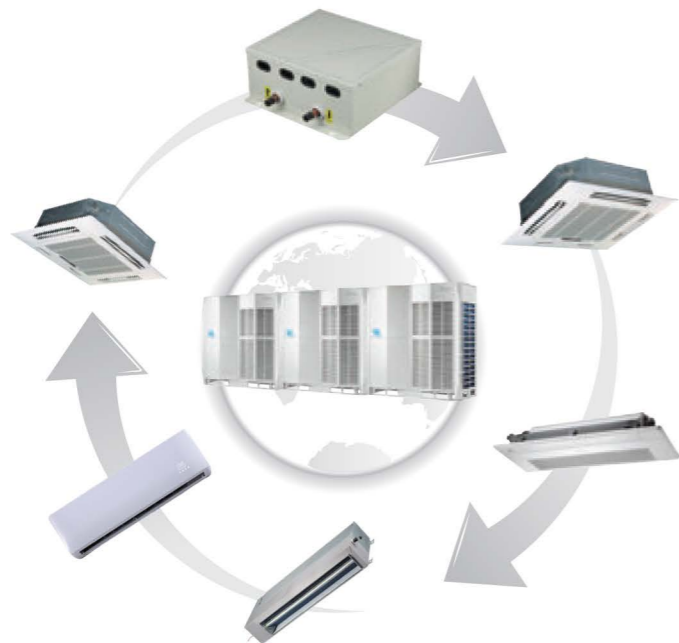

Single AHU Control Box Connection

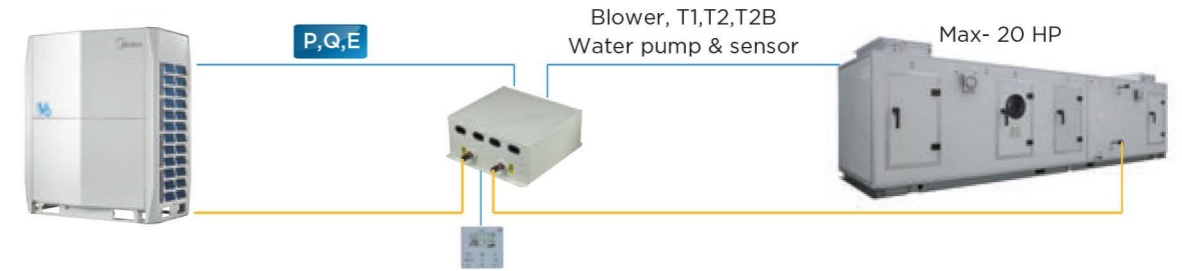

Multi AHU Control Boxes Connection

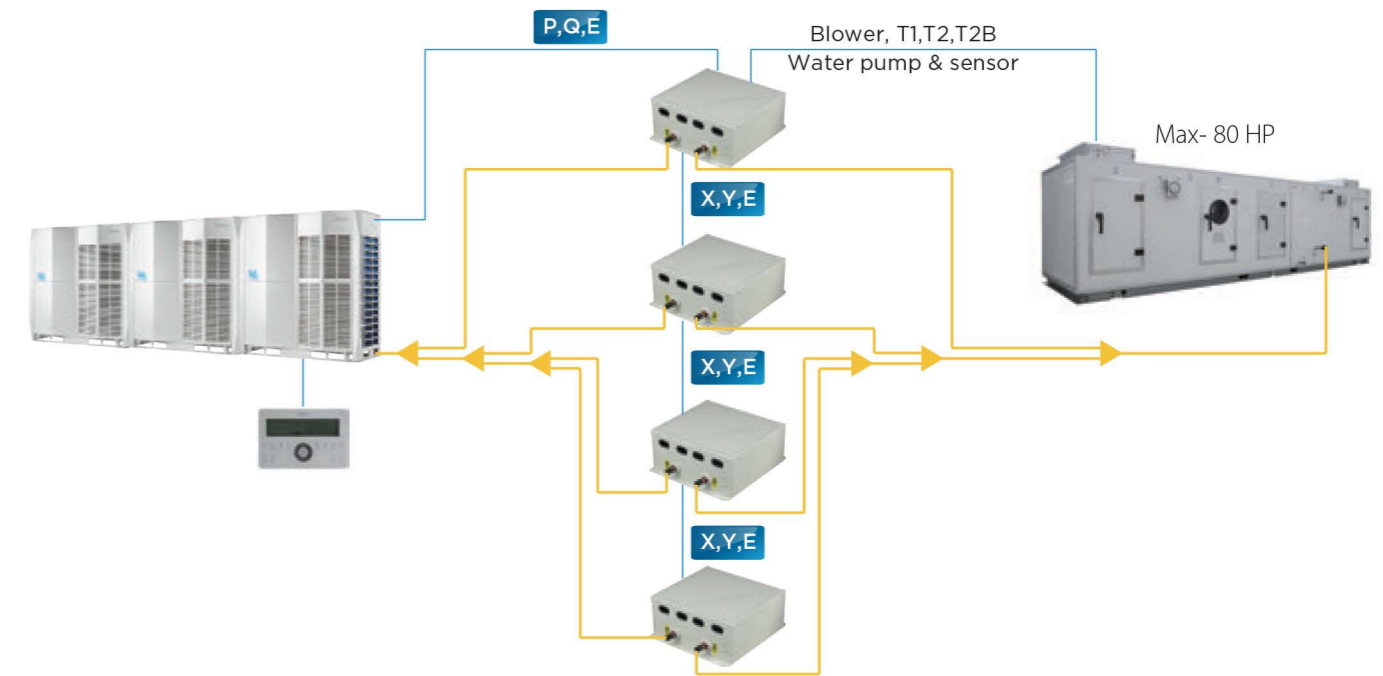

Specifications

Model		AHUKZ-01B	AHUKZ-02B	AHUKZ-03B
Capacity	HP	3.2-6	8-12	14-20
Power supply		1 phase, 220-240V, 50Hz; 1 phase, 208-230V, 60Hz		
Refrigerant		R410A		
Pipe connections (inlet and outlet)	mm	Φ8	Φ12.7	Φ15.9
Net dimensions (W×H×D)	mm	350×150×375		
Packed dimensions (W×H×D)	mm	420×240×490		
Net weight	kg	8.4	8.7	8.9
Gross weight	kg	11.4	11.7	11.9
Operating modes		Cooling, heating and fan only		
Standard controller		Wired controller		
Optional controller		Wireless remote controller; SIEMENS controller		